


HT PM-X



HSS-PM Mũi taro thẳng (~50HRC) Straight Fluted Taps for Hardened Steels (~50HRC)



- * có thể gia công thép làm khuôn có độ cứng cao HRC32~HRC50
- * chống mài mòn, hiệu suất cắt tuyệt vời, tuổi thọ gia công dài

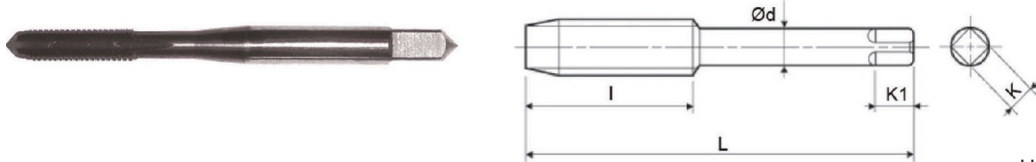

Units : mm

Size	Tap Limits	OAL	Thread Length	SD	Square Width	Square Length	Retail Price (VND)
		(L)	(I)	(d)	(K)	(K1)	
M 3 × 0.5	FH3	46	11	4	3.2	6	-
M 4 × 0.7	FH3	52	13	5	4	7	-
M 5 × 0.8	FH3	60	16	5.5	4.5	7	-
M 6 × 1.0	FH3	62	19	6	4.5	7	-
M 8 × 1.0	FH3	70	22	6.2	5	8	-
M 8 × 1.25	FH3	70	22	6.2	5	8	-
M 10 × 1.0	FH3	75	24	7	5.5	8	-
M 10 × 1.25	FH3	75	24	7	5.5	8	-
M 10 × 1.5	FH3	75	24	7	5.5	8	-
M 12 × 1.25	FH4	82	29	8.5	6.5	9	-
M 12 × 1.5	FH3	82	29	8.5	6.5	9	-
M 12 × 1.75	FH3	82	29	8.5	6.5	9	-

Mức Lực Index

Mũi Taro Taps

Mũi Khoan Drills

Dao Doa Reamers

Dao Phay SUPER Coating

Dao Phay SUPER PRO

Dao Phay HSSCo8

Dao Phay Diamond Coating

Phụ lục Appendix