

# M-PO




## Mũi taro thẳng M

### M Series Spiral Pointed Taps



\* Phù hợp để gia công lỗ kín sâu trên thép carbon và thép hợp kim, đồng thời dễ dàng loại bỏ phoi.

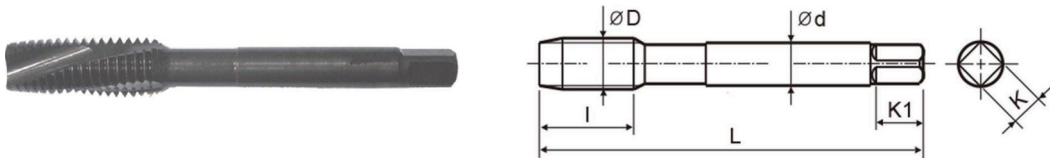

Units : mm

Size	Tap Limits	OAL	Thread length	SD	Square Width	Square Length	Retail Price
		(L)	(l)	(d)	(K)	(K1)	(VND)
M 2 × 0.4	FH2	40	9.5	3	2.5	4.3	-
M 2.5 × 0.45	FH2	44	9.5	3	2.5	4.3	-
M 2.6 × 0.45	FH2	44	9.5	3	2.5	4.3	-
M 3 × 0.5	FH2	46	11	4	3.2	5	-
M 4 × 0.7	FH2	52	13	5	4	6	-
M 5 × 0.8	FH2	60	16	5.5	4.5	6	-
M 6 × 1.0	FH2	62	19	6	4.5	6	-
M 7 × 1.0	FH2	65	19	6.2	5	7	-
M 8 × 1.0	FH3	70	22	6.2	5	8	-
M 8 × 1.25	FH3	70	22	6.2	5	8	-
M 10 × 1.25	FH3	75	24	7	5.5	8	-
M 10 × 1.5	FH3	75	24	7	5.5	8	-
M 12 × 1.25	FH3	82	29	8.5	6.5	9	-
M 12 × 1.5	FH3	82	29	8.5	6.5	9	-
M 12 × 1.75	FH4	82	29	8.5	6.5	9	-
M 14 × 1.5	FH3	88	30	10.5	8	10.8	-
M 14 × 2.0	FH4	88	30	10.5	8	10.8	-
M 16 × 1.5	FH3	95	32	12.5	10	12.8	-
M 16 × 2.0	FH4	95	32	12.5	10	12.8	-
M 18 × 1.5	FH4	100	37	14	11	13.8	-
M 18 × 2.5	FH4	100	37	14	11	13.8	-
M 20 × 1.5	FH4	105	37	15	12	14.8	-
M 20 × 2.5	FH4	105	37	15	12	14.8	-
M 22 × 1.5	FH4	115	38	17	13	15.8	-
M 22 × 2.5	FH4	115	38	17	13	15.8	-

Mục Lục Index
Mũi Taro Taps
Mũi Khoan Drills
Dao Doa Reamers
Dao Phay SUPER Coating
Dao Phay SUPER PRO
Dao Phay HSSCo8
Dao Phay Diamond Coating
Phụ lục Appendix

# M-PO



## Mũi taro thẳng M

M Series Spiral Pointed Taps

Units : mm

Size	Tap Limits	OAL	Thread length	SD	Square Width	Square Length	Retail Price
		(L)	(l)	(d)	(K)	(K1)	(VND)
M 24 x 1.5	FH4	120	45	19	15	17.8	-
M 24 x 3.0	FH4	120	45	19	15	17.8	-
W 3/16 - 24	JIS II	60	16	5.5	4.5	7	-
W 1/4 - 20	JIS II	62	19	6	4.5	7	-
W 5/16 - 18	JIS II	70	22	6.1	5	8	-
W 3/8 - 16	JIS II	75	24	6	5.5	8	-
W 1/2 - 12	JIS II	85	29	9	7	10	-
W 5/8 - 11	JIS II	95	32	12	9	11.8	-
W 3/4 - 10	JIS II	105	37	14	11	13.8	-
W 7/8 - 9	JIS II	115	38	17	13	15.8	-
W 1" - 8	JIS II	125	45	20	15	18	-
UNC 2 - 56	JIS II	42	9.5	3	2.5	4.8	-
UNC 4 - 40	JIS II	44	9.5	3	2.5	4.8	-
UNC 6 - 32	JIS II	48	13	4	3.2	6	-
UNC 8 - 32	JIS II	52	13	5	4	7	-
UNC 10 - 24	JIS II	60	16	5.5	4.5	7	-
UNC 3/16 - 24	JIS II	60	16	5.5	4.5	7	-
UNC 1/4 - 20	JIS II	62	19	6	4.5	7	-
UNC 5/16 - 18	JIS II	70	22	6.1	5	8	-
UNC 3/8 - 16	JIS II	75	24	7	5.5	8	-
UNC 1/2 - 13	JIS II	85	29	9	7	10	-
UNC 5/8 - 11	JIS II	95	32	12	9	11.8	-
UNC 3/4 - 10	JIS II	105	37	14	11	13.8	-
UNC 7/8 - 9	JIS II	115	38	17	13	15.8	-
UNC 1" - 8	JIS II	125	45	20	15	18	-
UNF 10 - 32	JIS II	60	16	5.5	4.5	7	-
UNF 3/16 - 32	JIS II	60	16	5.5	4.5	7	-
UNF 1/4 - 28	JIS II	62	19	6	4.5	7	-
UNF 5/16 - 24	JIS II	70	22	6.1	5	8	-
UNF 3/8 - 24	JIS II	75	24	7	5.5	8	-
UNF 1/2 - 20	JIS II	85	29	9	7	10	-
UNF 5/8 - 18	JIS II	95	32	12	9	11.8	-
UNF 3/4 - 16	JIS II	105	37	14	11	13.8	-
UNF 7/8 - 14	JIS II	115	38	17	13	15.8	-
UNF 1" - 12	JIS II	125	45	20	15	18	-

Mũi Taro Taps
Mũi Khoan Drills
Dao Dũa Reamers
Dao Phay SUPER Coating
Dao Phay SUPER PRO
Dao Phay HSSCo8
Dao Phay Diamond Coating
Phụ lục Appendix