

NI-PM-SP




Mũi taro xoắn chuyên dụng cho hợp kim niken

Spiral Fluted Taps for Nickel Base Alloys



* Phù hợp để gia công lỗ kín trên hợp kim niken, hợp kim niken crôm sắt 718 và hợp kim chịu nhiệt.

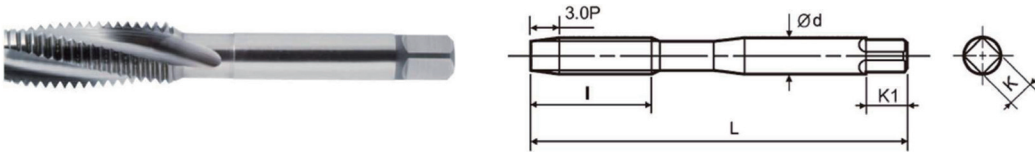

Units : mm

Size	Tap Limits	OAL	Thread length	SD	Square Width	Square Length	Retail Price (VND)
		(L)	(I)	(d)	(K)	(K1)	
M 2 × 0.4	FH2	40	9.5	3	2.5	4.8	-
M 3 × 0.5	FH3	46	11	4	3.2	6	-
M 4 × 0.7	FH3	52	13	4.5	4	7	-
M 5 × 0.8	FH3	60	16	5.5	4.5	7	-
M 6 × 1.0	FH3	62	19	6	4.5	7	-
M 8 × 1.25	FH3	70	22	6.2	5	8	-
M 10 × 1.25	FH4	75	24	7	5.5	8	-
M 10 × 1.5	FH3	75	24	7	5.5	8	-
M 12 × 1.25	FH4	82	29	8.5	6.5	9	-
M 12 × 1.5	FH3	82	29	8.5	6.5	9	-
M 12 × 1.75	FH3	82	29	8.5	6.5	9	-
M 14 × 1.5	FH4	88	30	10.5	8	11	-
M 14 × 2.0	FH4	88	30	10.5	8	11	-
M 16 × 1.5	FH4	95	32	12.5	10	13	-
M 16 × 2.0	FH4	95	32	12.5	10	13	-
M 18 × 1.5	FH4	100	37	14	11	14	-
M 18 × 2.5	FH4	100	37	14	11	14	-
M 20 × 1.5	FH4	105	37	15	12	15	-
M 20 × 2.5	FH4	105	37	15	12	15	-
M 22 × 1.5	FH4	115	38	17	13	16	-
M 22 × 2.5	FH4	115	38	17	13	16	-
M 24 × 1.5	FH4	120	45	19	15	18	-
M 24 × 3.0	FH4	120	45	19	15	18	-

◎ : Excellent ○ : Good

High Carbon Steels	Alloy Steels	Hardened Steels	Tool Steels	High Tension Cast Iron	Ti Alloy	Ni Alloy
C0.45 ~	SCM	25 ~ 45HRC	SKD	FCD		
◎	◎	◎	◎	○	○	◎

Mức Lực Index

Mũi Taro Taps

Mũi Khoan Drills

Dao Dũa Reamers

Dao Phay SUPER Coating

Dao Phay SUPER PRO

Dao Phay HSSCo8

Dao Phay Diamond Coating

Phụ lục Appendix